


# Disk scheduler




# Disk Management

- Management and ordering of disk access requests is important:
  - Huge speed gap between memory and disk
  - Disk throughput is extremely sensitive to
    - Request order  $\Rightarrow$  Disk Scheduling
    - Placement of data on the disk  $\Rightarrow$  file system design
  - Disk scheduler must be aware of *disk geometry*

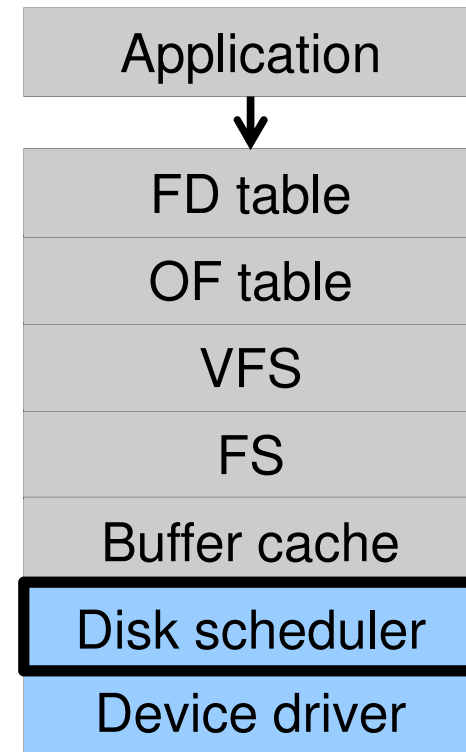

# Disk Geometry

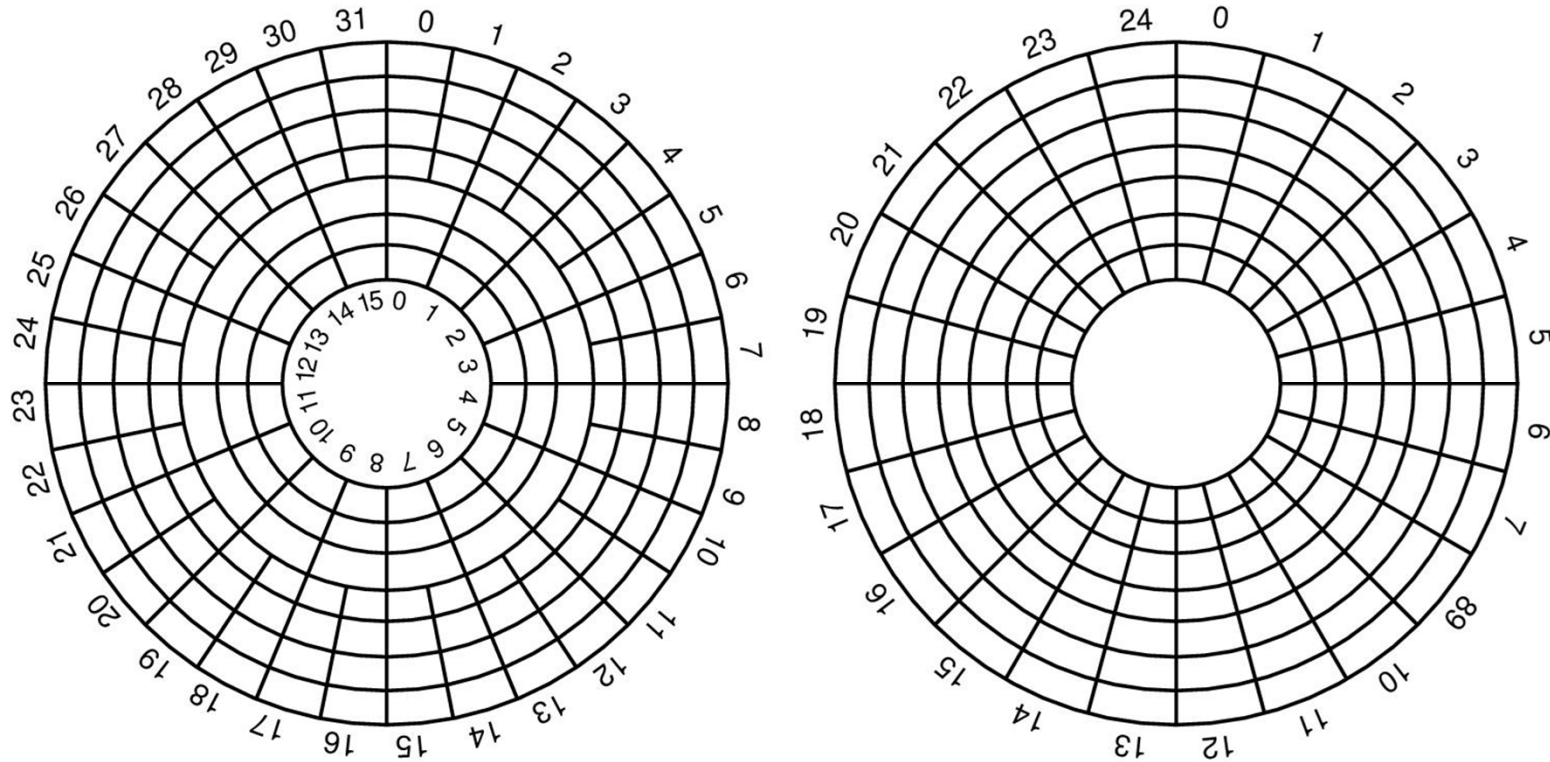

- Physical geometry of a disk with two zones
  - Outer tracks can store more sectors than inner without exceed max information density
- A possible virtual geometry for this disk



# Evolution of Disk Hardware

Parameter	IBM 360-KB floppy disk	WD 18300 hard disk
Number of cylinders	40	10601
Tracks per cylinder	2	12
Sectors per track	9	281 (avg)
Sectors per disk	720	35742000
Bytes per sector	512	512
Disk capacity	360 KB	18.3 GB
Seek time (adjacent cylinders)	6 msec	0.8 msec
Seek time (average case)	77 msec	6.9 msec
Rotation time	200 msec	8.33 msec
Motor stop/start time	250 msec	20 sec
Time to transfer 1 sector	22 msec	17 $\mu$ sec

Disk parameters for the original IBM PC floppy disk and a Western Digital WD 18300 hard disk




## Things to Note

- Average seek time is approx 12 times better
- Rotation time is 24 times faster
- Transfer time is 1300 times faster
- Most of this gain is due to increase in density
- Represents a gradual engineering improvement



# Storage Capacity is 50000 times greater

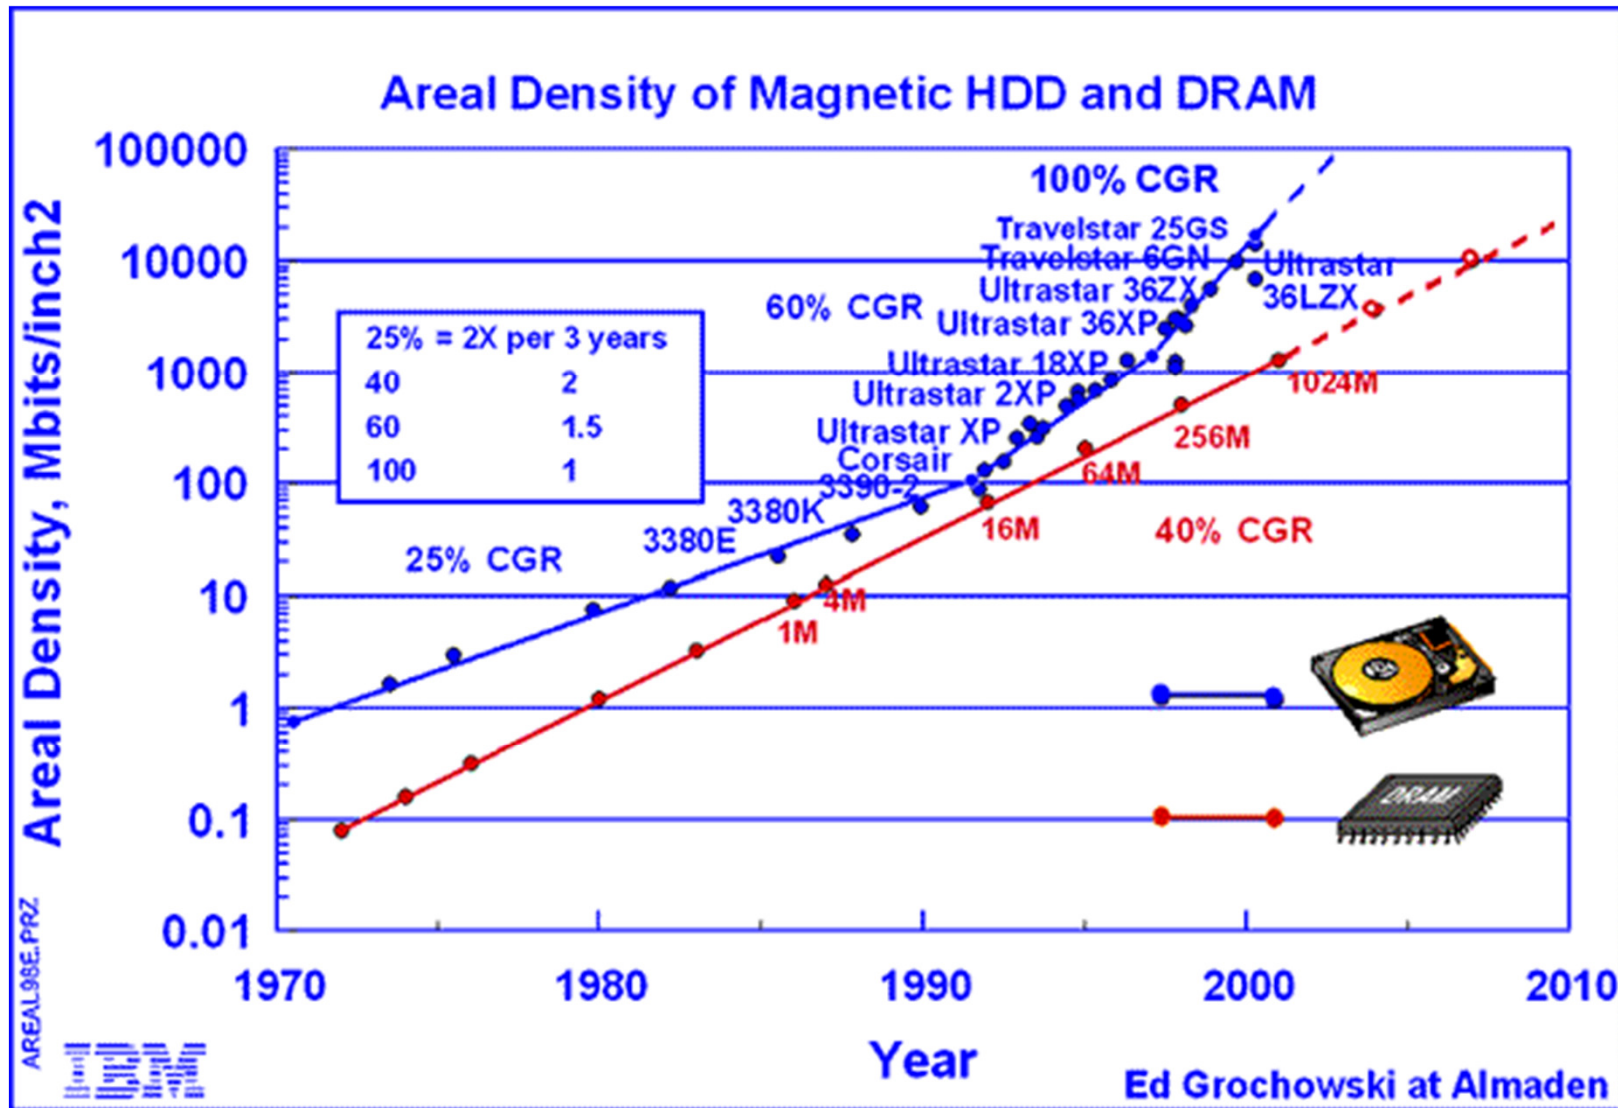

# Estimating Access Time

- *Seek time*  $T_s$ : Moving the head to the required track
  - ★ not linear in the number of tracks to traverse:
    - startup time
    - settling time
  - ★ Typical average seek time: a few milliseconds
- *Rotational delay*:
  - ★ rotational speed,  $r$ , of 5,000 to 10,000rpm
  - ★ At 10,000rpm, one revolution per 6ms  $\Rightarrow$  average delay 3ms
- *Transfer time*:  
to transfer  $b$  bytes, with  $N$  bytes per track:  $T = \frac{b}{rN}$

Total average access time:  $T_a = T_s + \frac{1}{2r} + \frac{b}{rN}$





# A Timing Comparison

- $T_s = 2 \text{ ms}$ ,  $r = 10,000 \text{ rpm}$ , 512B sect, 320 sect/track
- Read a file with 2560 sectors (= 1.3MB)
- File stored compactly (8 adjacent tracks):

Read first track

Average seek	2ms
Rot. delay	3ms
Read 320 sectors	6ms

11ms  $\Rightarrow$  All sectors:  $11 + 7 * 8 = 67 \text{ ms}$

- Sectors distributed randomly over the disk:

Read any sector


Average seek	2ms
Rot. delay	3ms
Read 1 sector	0.01875ms

5.01875ms  $\Rightarrow$  All:  $2560 * 5.01875 = 20,328 \text{ms}$



# Disk Performance is Entirely Dominated by Seek and Rotational Delays

- Will only get worse as capacity increases much faster than increase in seek time and rotation speed
  - Note it has been easier to spin the disk faster than improve seek time
- Operating System should minimise mechanical delays as much as possible

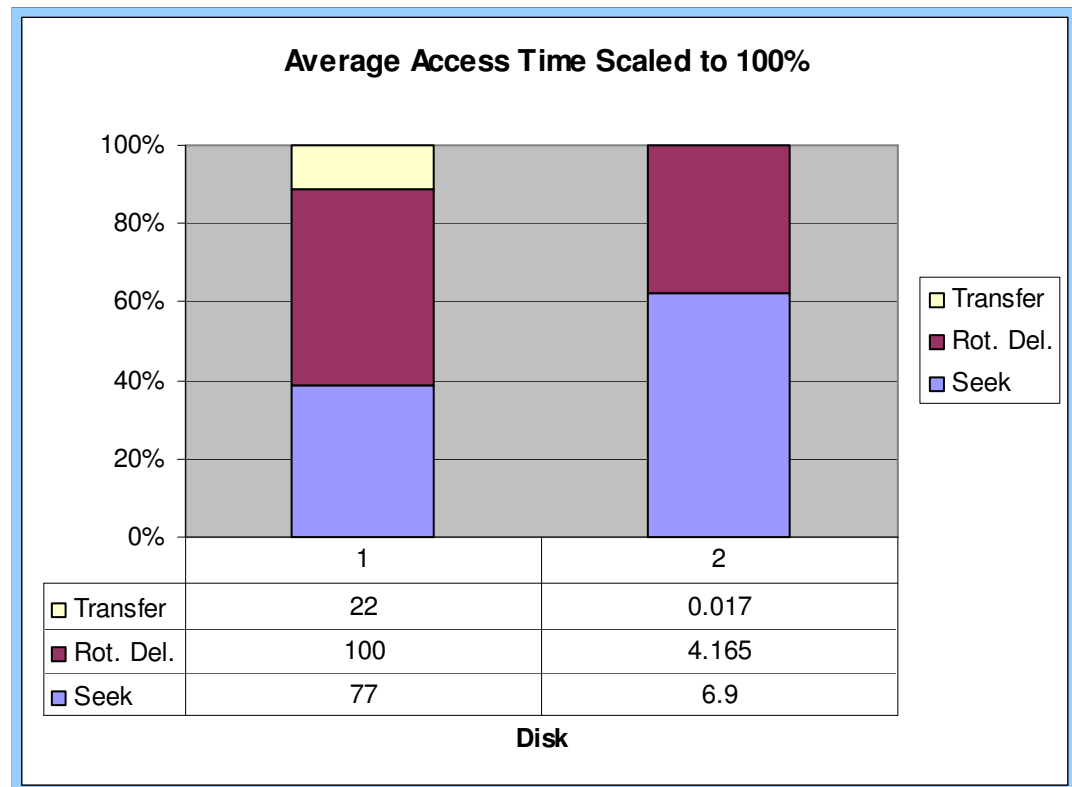

# Disk Arm Scheduling Algorithms


- Time required to read or write a disk block determined by 3 factors
  1. Seek time
  2. Rotational delay
  3. Actual transfer time
- Seek time dominates
- For a single disk, there will be a number of I/O requests
  - Processing them in random order leads to worst possible performance



# First-in, First-out (FIFO)

- Process requests as they come
- Fair (no starvation)
- Good for a few processes with clustered requests
- Deteriorates to random if there are many processes


Request tracks: 55, 58, 39, 18, 90, 160, 150, 38, 184

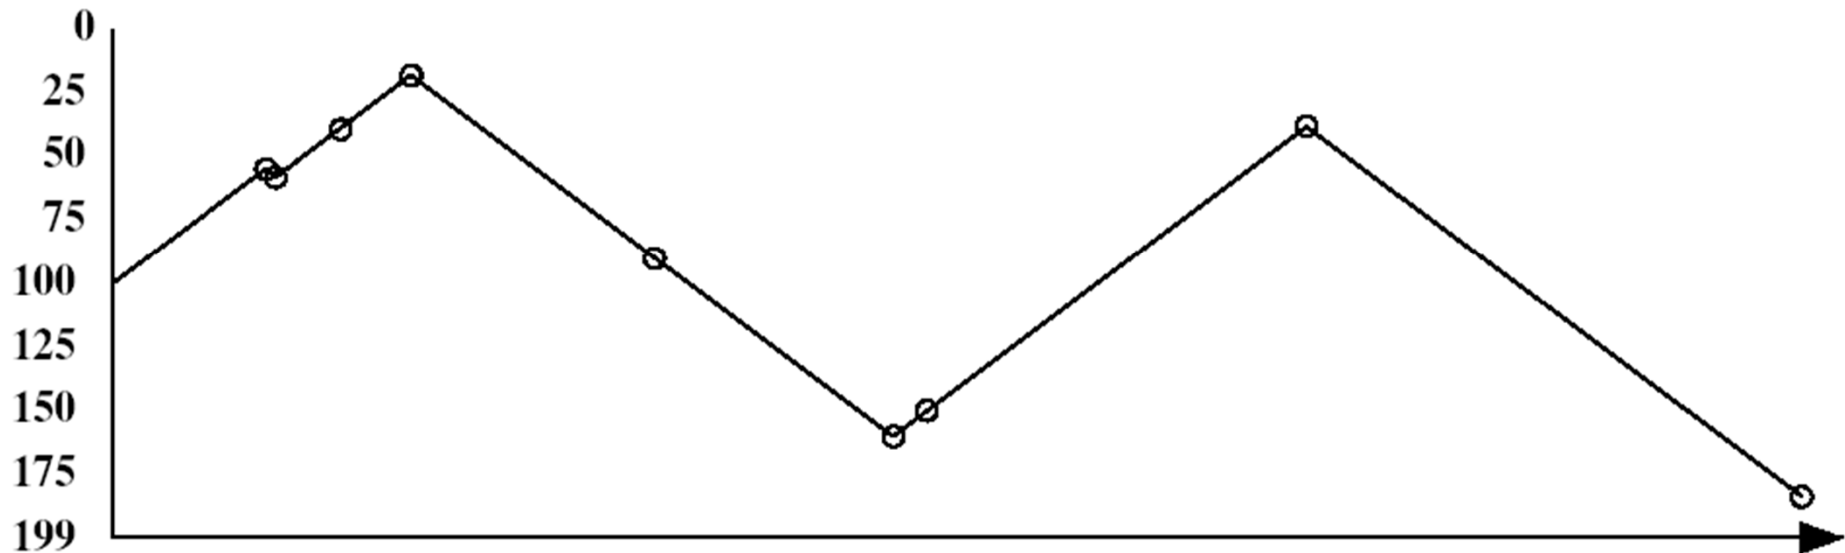

# Shortest Seek Time First

- Select request that minimises the seek time
- Generally performs much better than FIFO
- May lead to starvation

Request tracks: 55, 58, 39, 18, 90, 160, 150, 38, 184

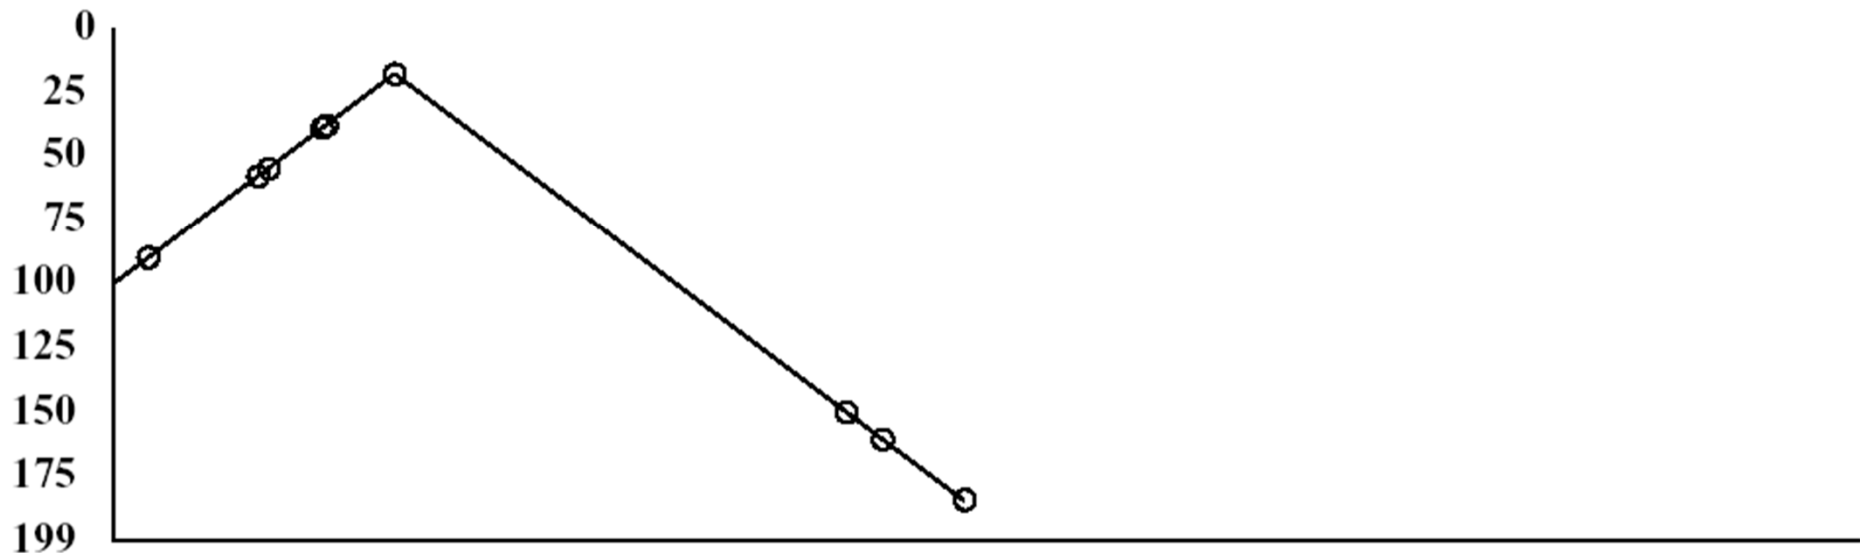

# Elevator Algorithm (SCAN)

- **Move head in one direction**

- Services requests in track order until it reaches the last track, then reverses direction


- **Better than FIFO, usually worse than SSTF**

- **Avoids starvation**

- **Makes poor use of sequential reads (on down-scan)**

- **Inner tracks serviced more frequently than outer tracks**

Request tracks: 55, 58, 39, 18, 90, 160, 150, 38, 184

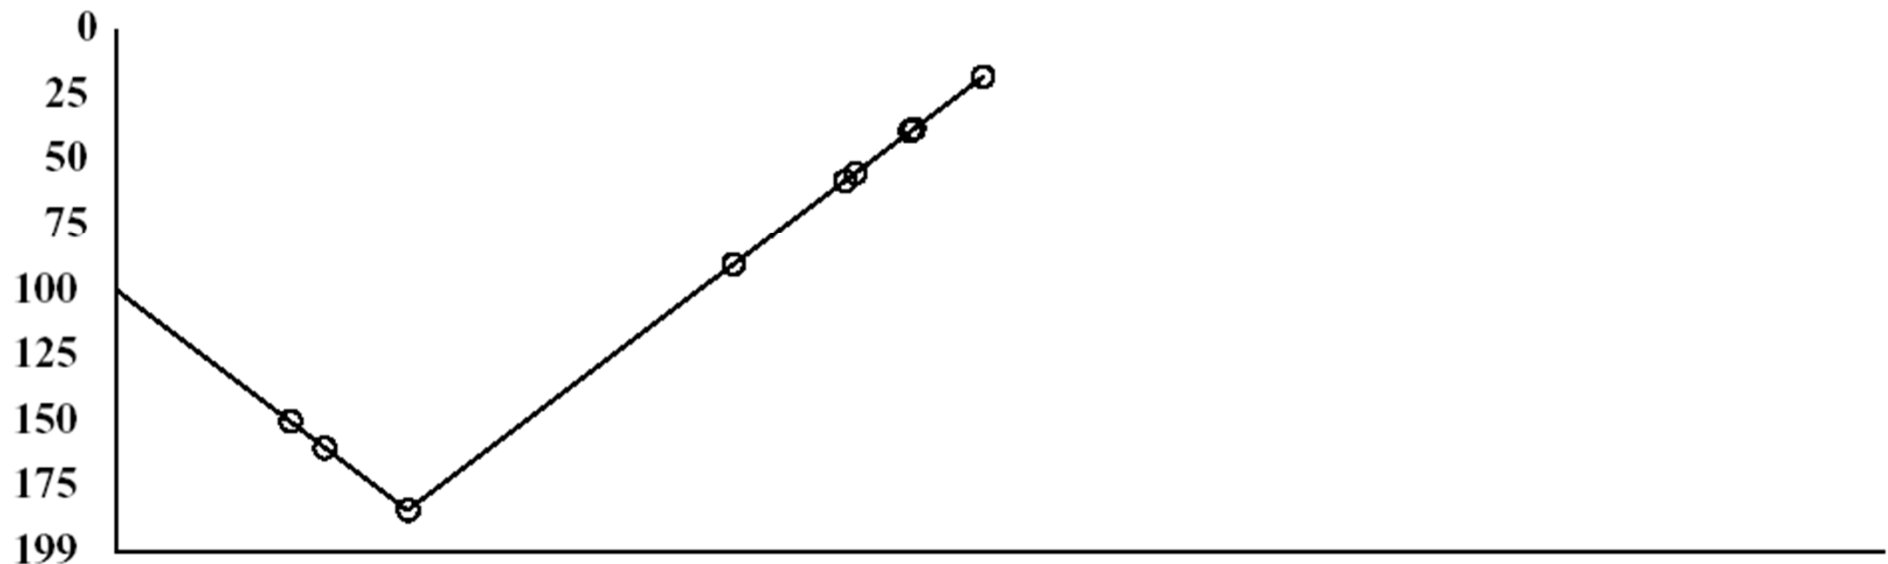

# Modified Elevator (Circular SCAN, C-SCAN)

- Like elevator, but reads sectors in only one direction
- When reaching last track, go back to first track non-stop
  - Note: seeking across disk in one movement faster than stopping along the way.
- Better locality on sequential reads
- Better use of read ahead cache on controller
- Reduces max delay to read a particular sector

Request tracks: 55, 58, 39, 18, 90, 160, 150, 38, 184

